

Studio B Gold Lion 300R 0dBu UNBAL REPORT

Overall Result: **PASS**

SUMMARY:	RESULT
A01 Ampl, Phase, Gain	✓
A02 Ampl, Phase vs Freq	✓
A03 Gain vs Ampl	✓
A04 THD+N, THD, nth-HD 2 3 4 - THD+N minus 2nd and 3rd harmonics	✓
A05 THD+N vs Freq	✓
A06 THD+N vs Ampl	✓
A07 Noise, SNR	✓
A08 Crosstalk A to B	✓
A09 Crosstalk B to A	✓
A10 Crosstalk A to B vs Freq	✓
A11 Crosstalk B to A vs Freq	✓
A12 FFT 1000 Hz THD+N	✓
A13 FFT 50+7000Hz	✓
A14 FFT 600+1700 Hz	✓
A15 FFT 19+20 KHz	✓
A16 FFT residual noise	✓

KEY: ✓ = Test passes, ✗ = Test fails, OK = Test has run but has no limit checking, (✗) = Test has failed to run or has not completed, [✓] = Test passes but is not required, [✗] = Test fails but is not required, ? = Test is required but has not been run.
- = Test is not required.

[Back to top](#)

A01 Ampl, Phase, Gain: **PASSED**

Measured at 5/7/2021 12:51:23 PM

Generator Settings		
Channel A:	sine, 0 dBu at 1000 Hz	
Channel B:	sine, 0 dBu at 1000 Hz	

Signal Analyzer Readings		
RMS amplitude (Channel A)	-0.047 dBu	< 3 dBu > -3 dBu
RMS amplitude (Channel B)	0.038 dBu	< 3 dBu > -3 dBu
Inter-channel phase	-0.07 °	< 10 ° > -10 °

CTA Readings		
Gain (Channel A RMS)	-0.048 dB	< 3 dB > -3 dB
Gain (Channel B RMS)	0.038 dB	< 3 dB > -3 dB
Settings: Generator relative, 22 Hz - 22 kHz, unweighted RMS with 1/3rd octave band-pass filter at the generator frequency		


[Back to top](#)

A02 Ampl, Phase vs Freq: **PASSED**


Measured at 5/7/2021 12:51:25 PM

Generator Settings		
Channel A:	sine, -3 dBFS at 1000 Hz	
Channel B:	sine, -3 dBFS at 1000 Hz	

Frequency Response and Inter-channel Phase

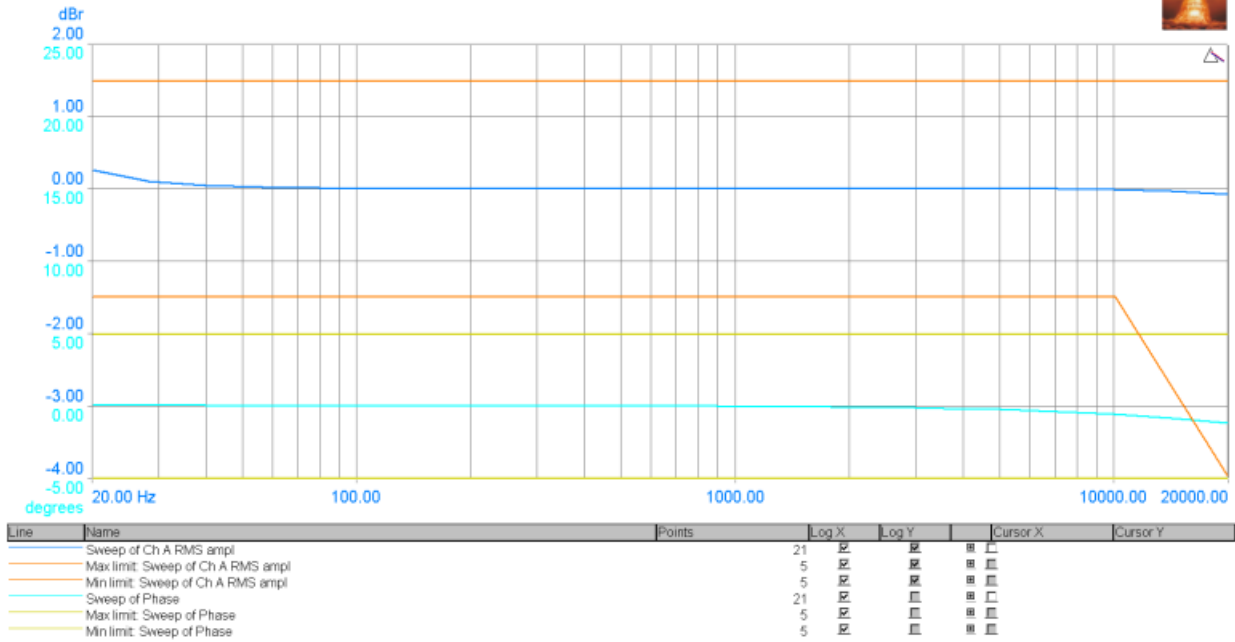

Frequency Response and Inter-channel Phase

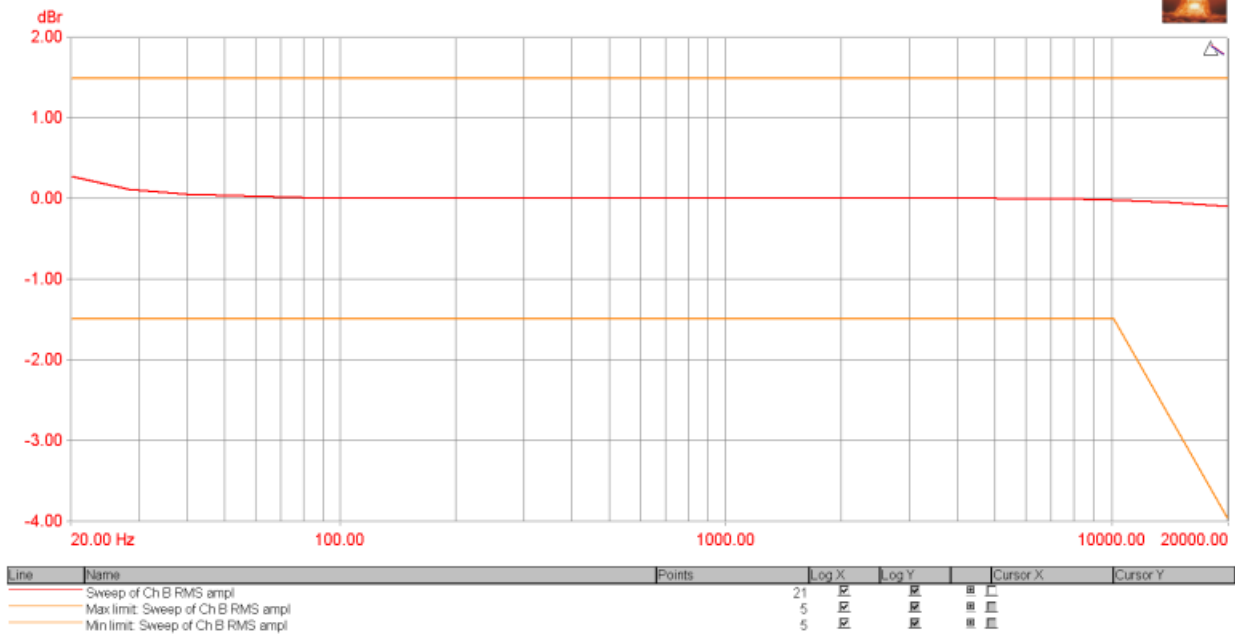


[Back to top](#)

A03 Gain vs Ampl: PASSED


Measured at 5/7/2021 12:51:37 PM

Generator Settings	
Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

Gain vs Amplitude

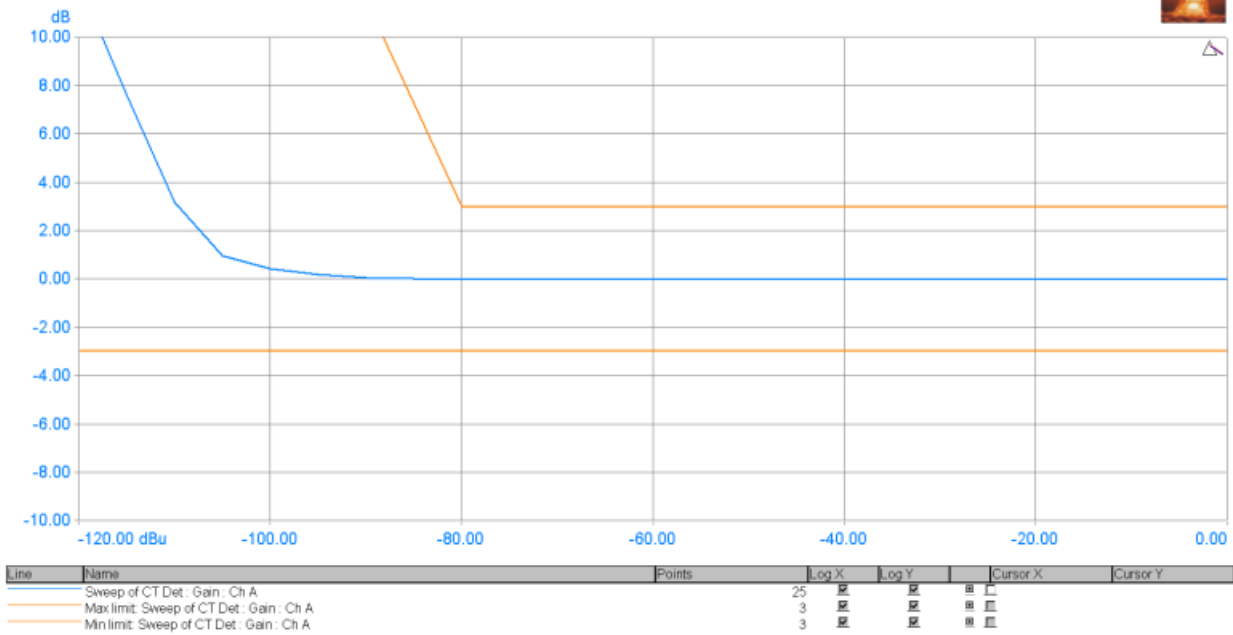

Gain vs Amplitude

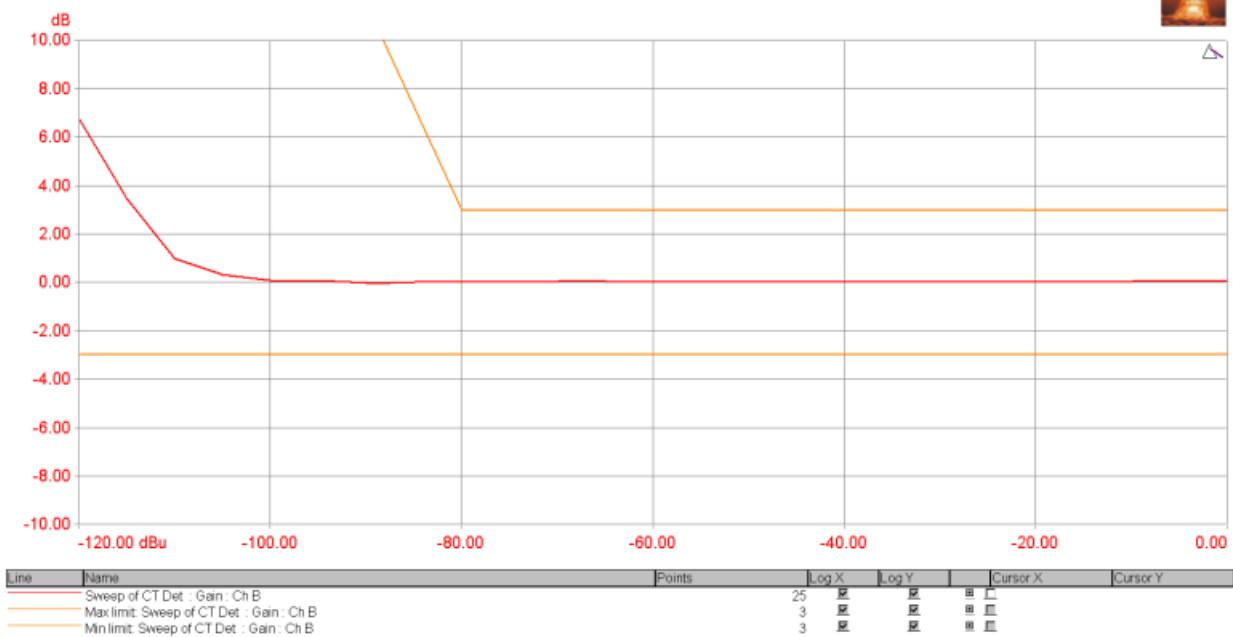

[Back to top](#)

A04 THD+N,THD, nth-HD 2 3 4 - THD+N minus 2nd and 3rd harmonics: **PASSED**

Measured at 5/7/2021 12:51:53 PM

Generator Settings	
Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

Signal Analyzer Readings		
RMS amplitude (Channel A)	-0.048 dBu	Not limit checked.
RMS amplitude (Channel B)	0.038 dBu	Not limit checked.

CTA Readings		
THD+N - relative (Channel A RMS)	0.14919 %	<200 % >0 %
THD+N - relative (Channel B RMS)	0.12328 %	<200 % >0 %
Settings: Self relative, 22 Hz - 22 kHz, unweighted RMS with 1/3rd octave band-reject filter at the input frequency		


FFT Detector Readings		
THD (Channel A)	0.16011 %	<200 % >0 %
THD (Channel B)	0.13239 %	<200 % >0 %
FFTD 1 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filters from the 2nd to 10th harmonics		
2nd Harmonic Distortion (Channel A)	0.16008 %	<200 % >0 %
2nd Harmonic Distortion (Channel B)	0.13235 %	<200 % >0 %
FFTD 2 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 2nd harmonic		
3rd Harmonic Distortion (Channel A)	0.00316 %	<200 % >0 %
3rd Harmonic Distortion (Channel B)	0.00320 %	<200 % >0 %
FFTD 3 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 3rd harmonic		
4th Harmonic Distortion (Channel A)	0.00030 %	Not limit checked.
4th Harmonic Distortion (Channel B)	0.00054 %	Not limit checked.
FFTD 4 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 4th harmonic		
5th Harmonic Distortion (Channel A)	0.00042 %	Not limit checked.
5th Harmonic Distortion (Channel B)	0.00033 %	Not limit checked.
FFTD 5 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 5th harmonic		
4+HD + N (Channel A)	0.00155 %	<0.05 % >0 %
4+HD + N (Channel B)	0.00145 %	<0.05 % >0 %
FFTD 6 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-reject notch filters, fundamental to the 3rd harmonic		
Hum (Channel A)	0.00096 %	<0.017783 % >0 %
Hum (Channel B)	0.00092 %	<0.017783 % >0 %
FFTD 7 Settings: Self relative, 22 Hz - 22 kHz, unweighted with window notch (14 bins) band-pass filter at 60 Hz		
Noise (residual) (Channel A)	0.00145 %	<0.017783 % >0 %
Noise (residual) (Channel B)	0.00130 %	<0.017783 % >0 %
FFTD 8 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-reject notch filters, fundamental to the 10th harmonic		

[Back to top](#)


A05 THD+N vs Freq: PASSED

Measured at 5/7/2021 12:52:55 PM

Generator Settings	
Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

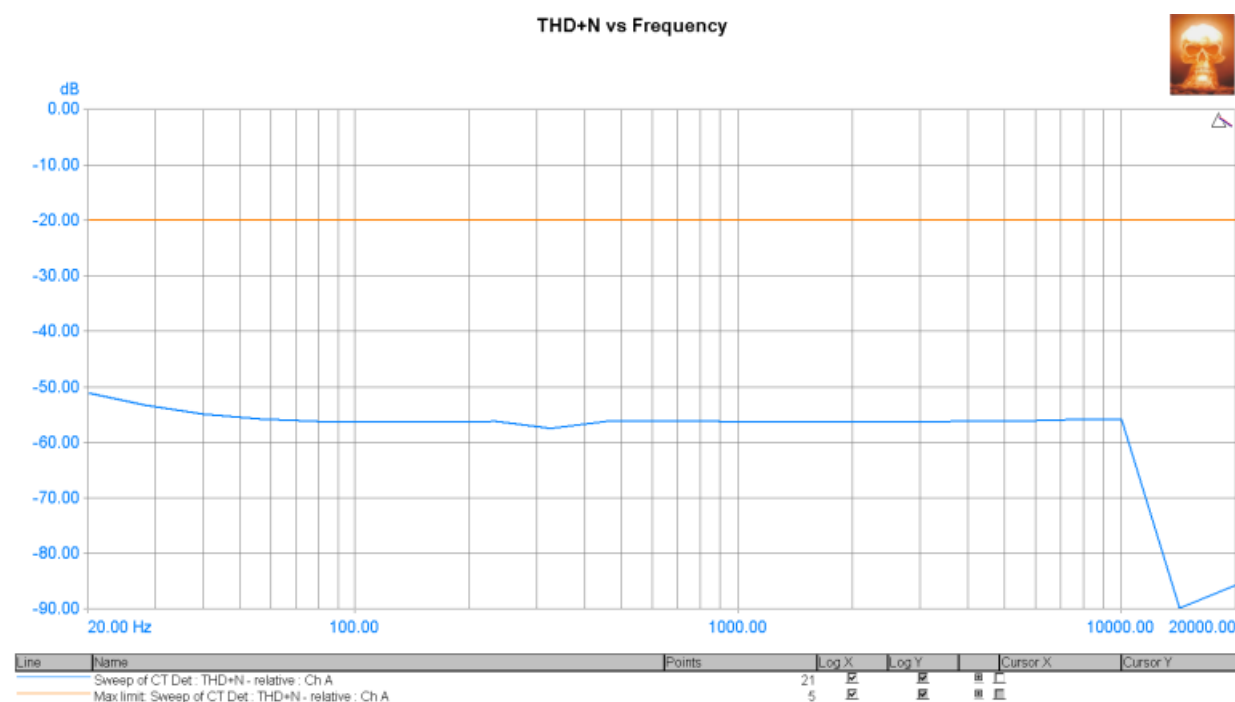

THD+N vs Frequency

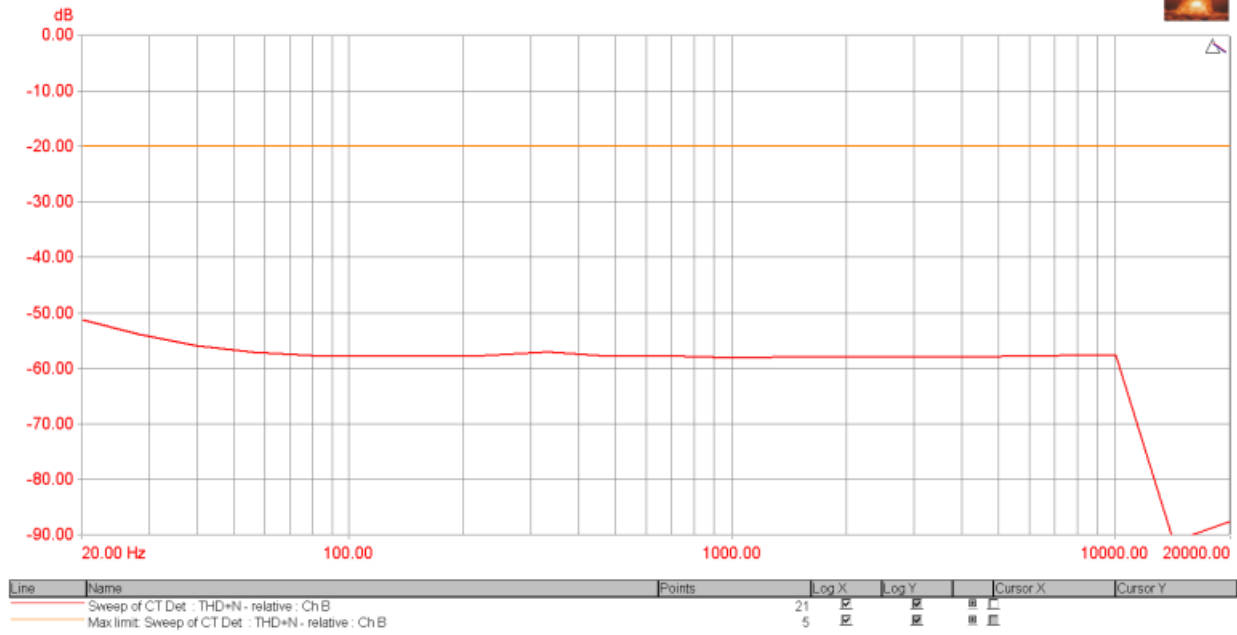

[Back to top](#)


A06 THD+N vs Ampl: **PASSED**

Measured at 5/7/2021 12:53:04 PM


Generator Settings

Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

THD+N vs Amplitude

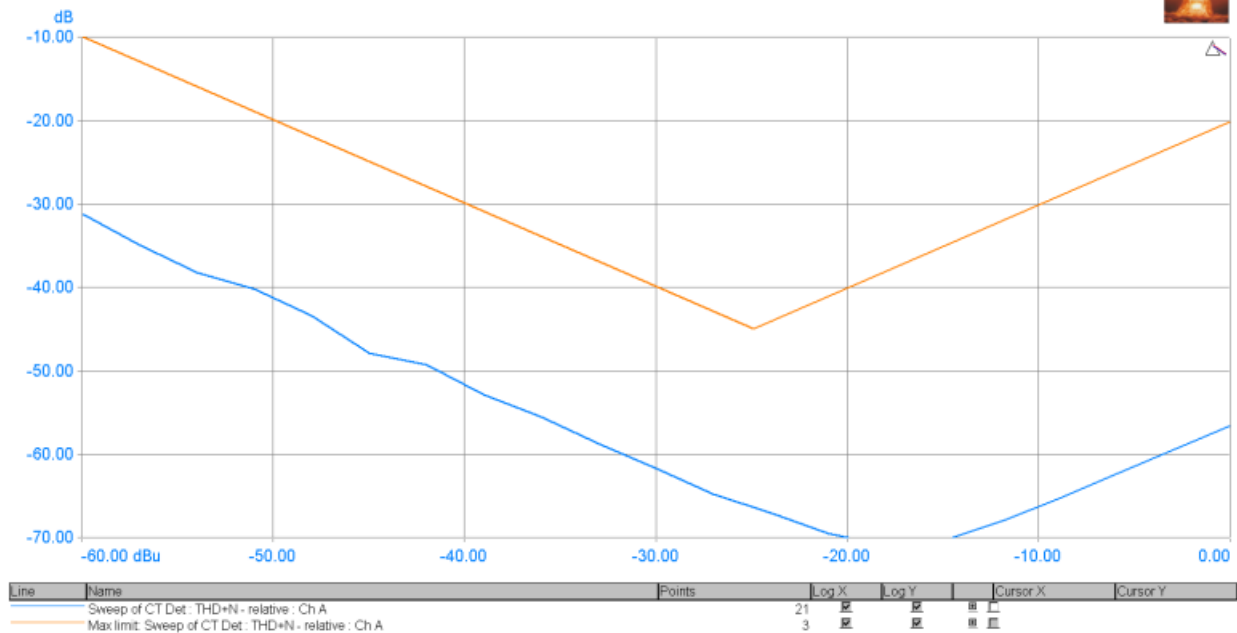

THD+N vs Amplitude

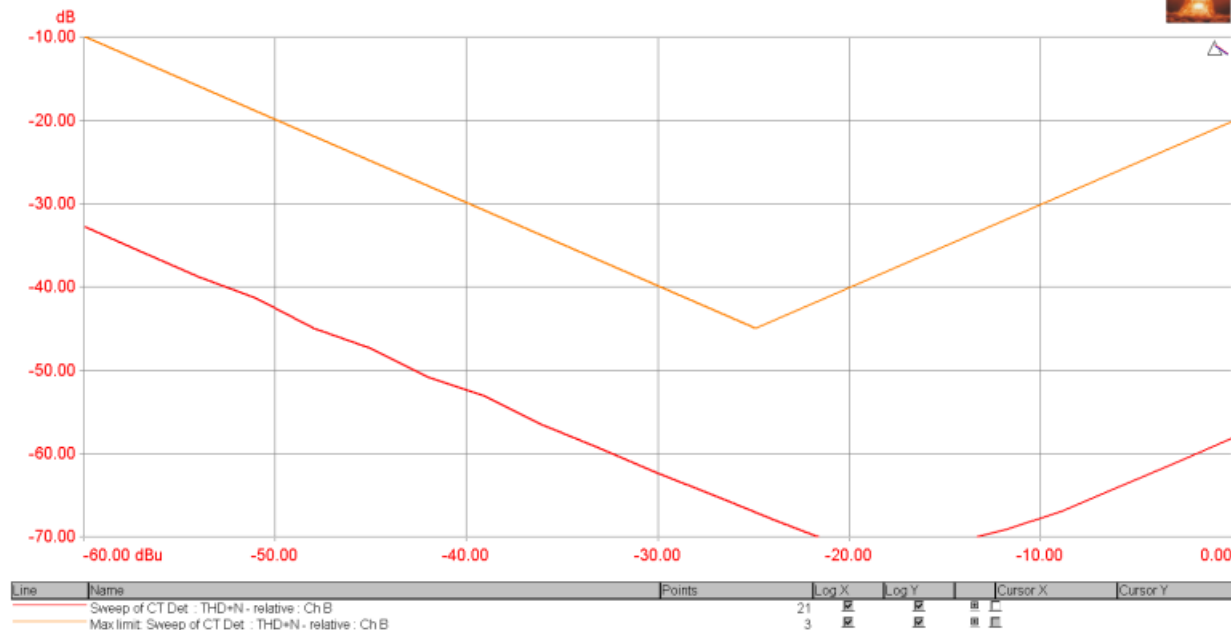

[Back to top](#)

A07 Noise, SNR: PASSED

Measured at 5/7/2021 12:53:16 PM

Generator Settings	
Channel A:	sine, -60 dBFS at 1000 Hz
Channel B:	sine, -60 dBFS at 1000 Hz

FFT Detector Readings		
Noise (unweighted) (Channel A)	-108.633 dBr	< 200 dBr > -200 dBr
Noise (unweighted) (Channel B)	-109.141 dBr	< 200 dBr > -200 dBr
FFTD 1 Settings: 22 Hz - 22 kHz, unweighted with window notch (14 bins) band-reject filter at the generator frequency		
SNR (Channel A)	-108.767 dBr	< 200 dBr > -200 dBr
SNR (Channel B)	-109.198 dBr	< 200 dBr > -200 dBr
FFTD 2 Settings: 22 Hz - 22 kHz, unweighted with 1/3rd octave band-reject filter at the generator frequency		

[Back to top](#)

A08 Crosstalk A to B: PASSED

Measured at 5/7/2021 12:53:19 PM

Generator Settings	
Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

CTA Readings		
Cross-talk (Channel B RMS)	-77.565 dB	< -45 dB
Settings: Channel relative, 22 Hz - 22 kHz, unweighted RMS with 1/24th octave band-pass filter at the opposite channel generator frequency		

[Back to top](#)

A09 Crosstalk B to A: PASSED

Measured at 5/7/2021 12:53:21 PM

Generator Settings	
Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

CTA Readings

Cross-talk (Channel ARMS)

-74.176 dB

< -45 dB

Settings: Channel relative, 22 Hz - 22 kHz, unweighted RMS with 1/24th octave band-pass filter at the opposite channel generator frequency


[Back to top](#)

A10 Crosstalk A to B vs Freq: PASSED

Measured at 5/7/2021 12:59:02 PM

Generator Settings

Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

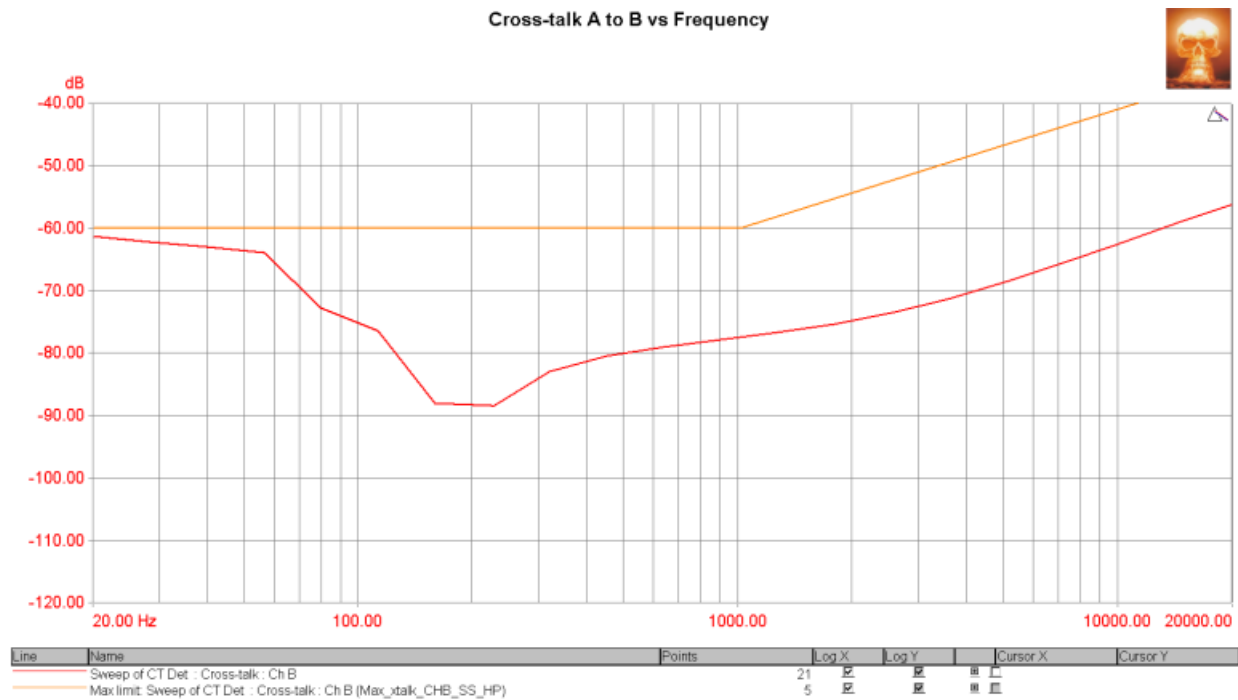

[Back to top](#)


A11 Crosstalk B to A vs Freq: PASSED

Measured at 5/7/2021 12:57:05 PM

Generator Settings

Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz

Cross-talk B to A vs Frequency

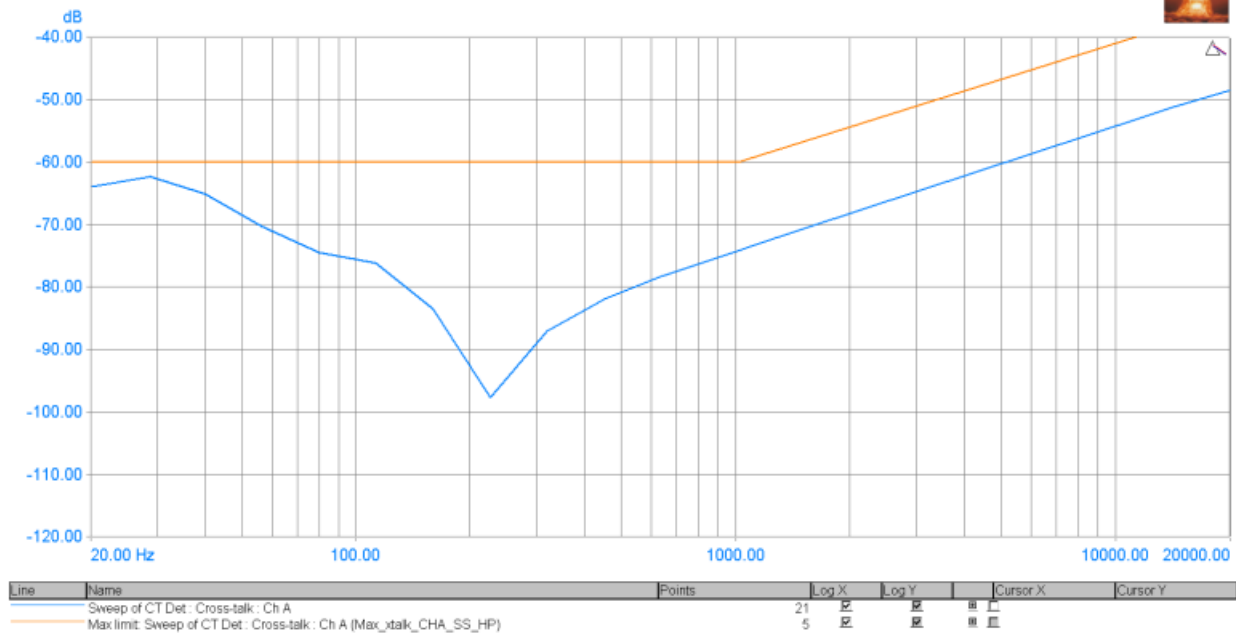

[Back to top](#)

A12 FFT 1000 Hz THD+N: **PASSED**


Measured at 5/7/2021 12:53:39 PM

Generator Settings	
Channel A:	sine, 0 dBu at 1000 Hz
Channel B:	sine, 0 dBu at 1000 Hz


Signal Analyzer Readings		
RMS amplitude (Selected : Ch A)	-0.047 dBu	Not limit checked.
RMS amplitude (Non-selected : Ch A)	0.039 dBu	Not limit checked.

CTA Readings		
THD+N - relative (Selected : Ch ARMS)	0.14956 %	< 5 %
THD+N - relative (Non-selected : Ch ARMS)	0.12390 %	< 5 %
Settings: Self relative, 22 Hz - 22 kHz, unweighted RMS with 1/3rd octave band-reject filter at the input frequency		

FFT 1000 Hz THD+N

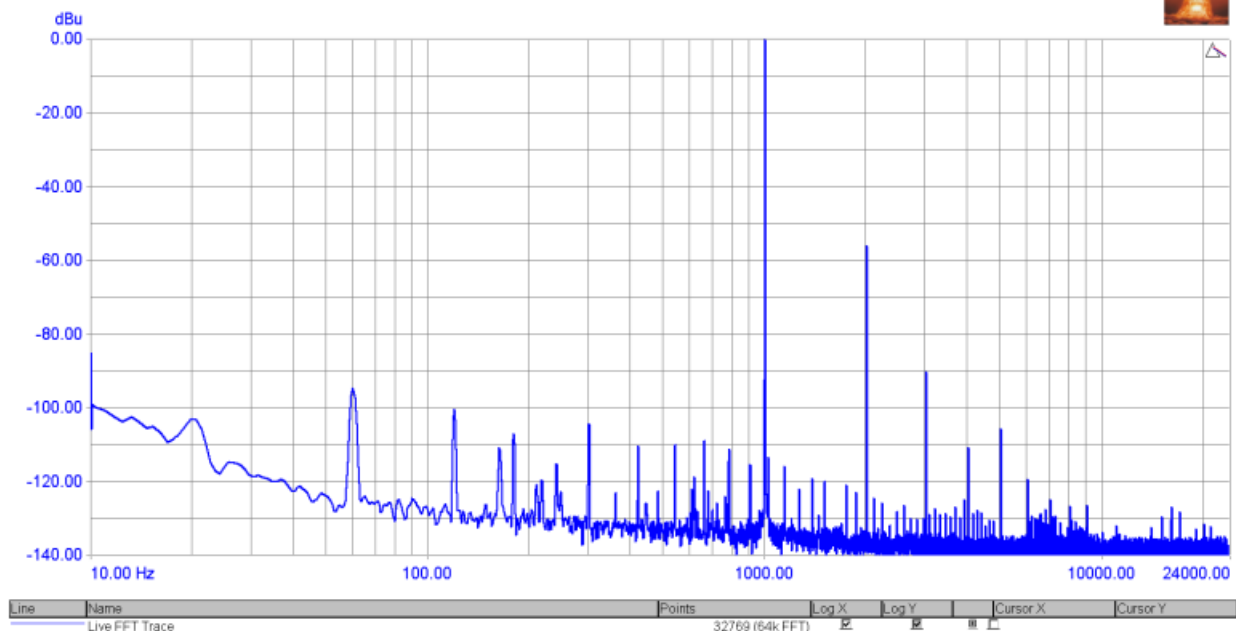

FFT 1000 Hz THD+N

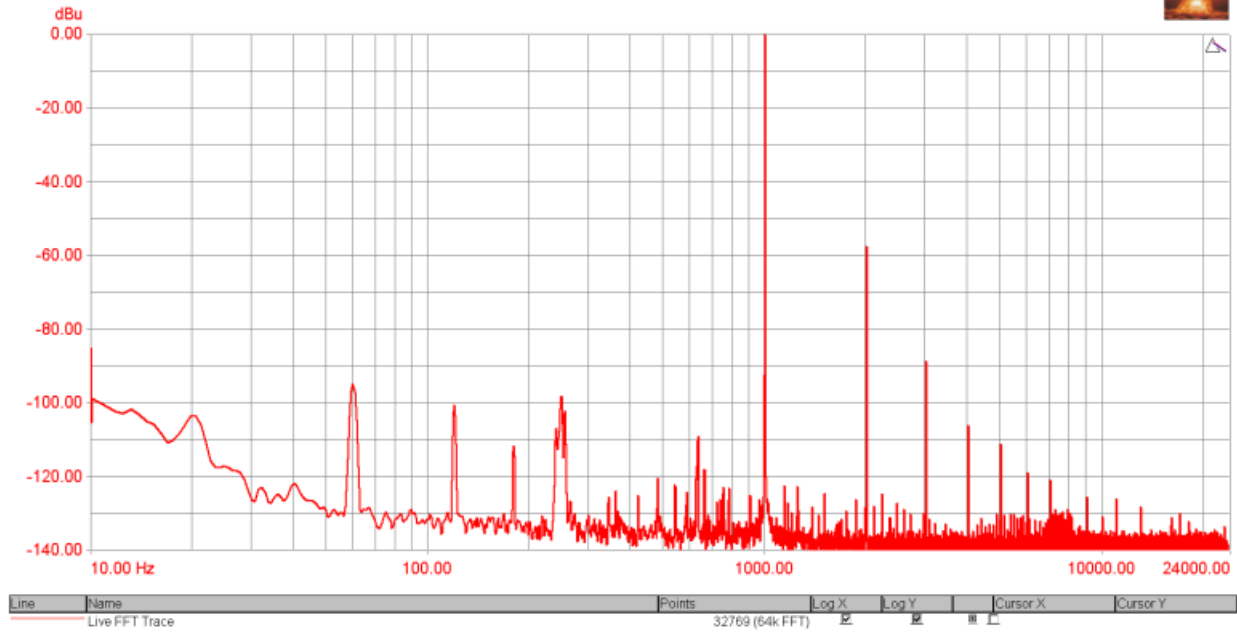

[Back to top](#)


A13 FFT 50+7000Hz: PASSED

Measured at 5/7/2021 12:54:02 PM


Generator Settings	
Channel A:	Twin-tone, 0 dBu at 50 Hz and 1 amplitude ratio at 7000Hz
Channel B:	Twin-tone, 0 dBu at 50 Hz and 1 amplitude ratio at 7000Hz

Signal Analyzer Readings		
RMS amplitude (Channel A)	2.969 dBu	Not limit checked.
RMS amplitude (Channel B)	3.048 dBu	Not limit checked.

FFT 50 + 7000 Hz

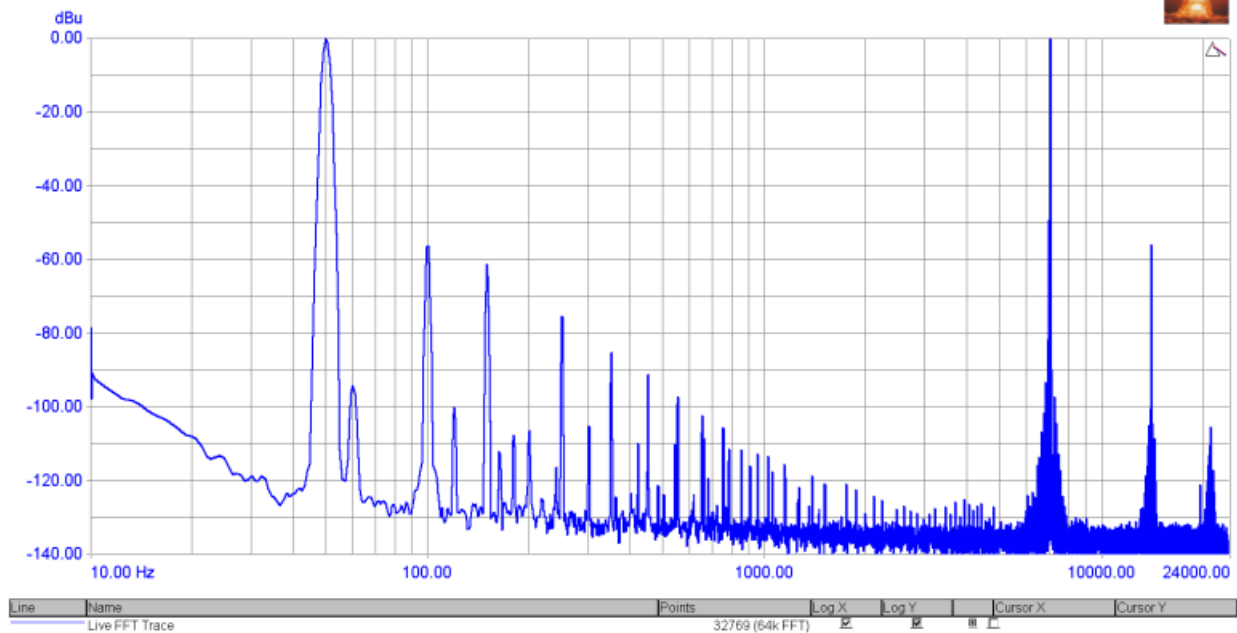

FFT 50 + 7000 Hz

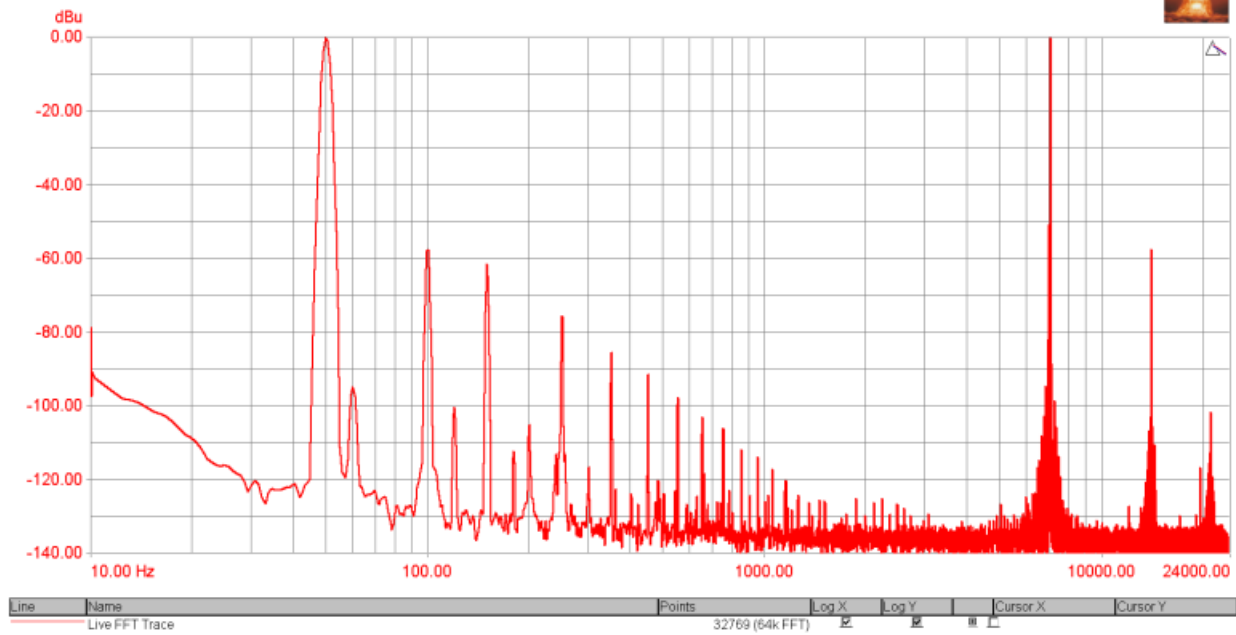

FFT Detector Readings

IMD SMPTE-DIN (Channel A)	0.31650 %	≤ 7 %
IMD SMPTE-DIN (Channel B)	0.25970 %	≤ 7 %
FFTD 1 Settings: Self relative, 22 Hz - 22 kHz, unweighted with intermodulation notch band reject		

[Back to top](#)

A14 FFT 600+1700 Hz: PASSED

Measured at 5/7/2021 12:54:24 PM


Generator Settings

Channel A:	Twin-tone, 0 dBu at 600 Hz and 1 amplitude ratio at 1700Hz
Channel B:	Twin-tone, 0 dBu at 600 Hz and 1 amplitude ratio at 1700Hz


Signal Analyzer Readings

RMS amplitude (Channel A)	2.945 dBu	Not limit checked.
RMS amplitude (Channel B)	3.044 dBu	Not limit checked.

FFT 600 + 1700 Hz

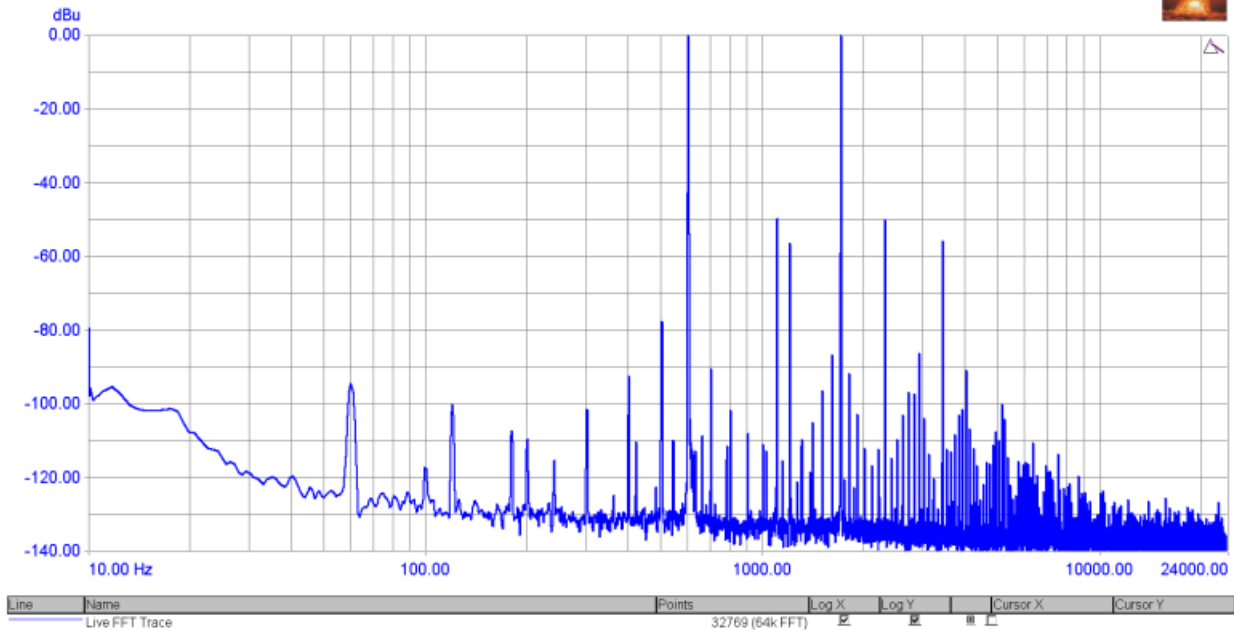

FFT 600 + 1700 Hz

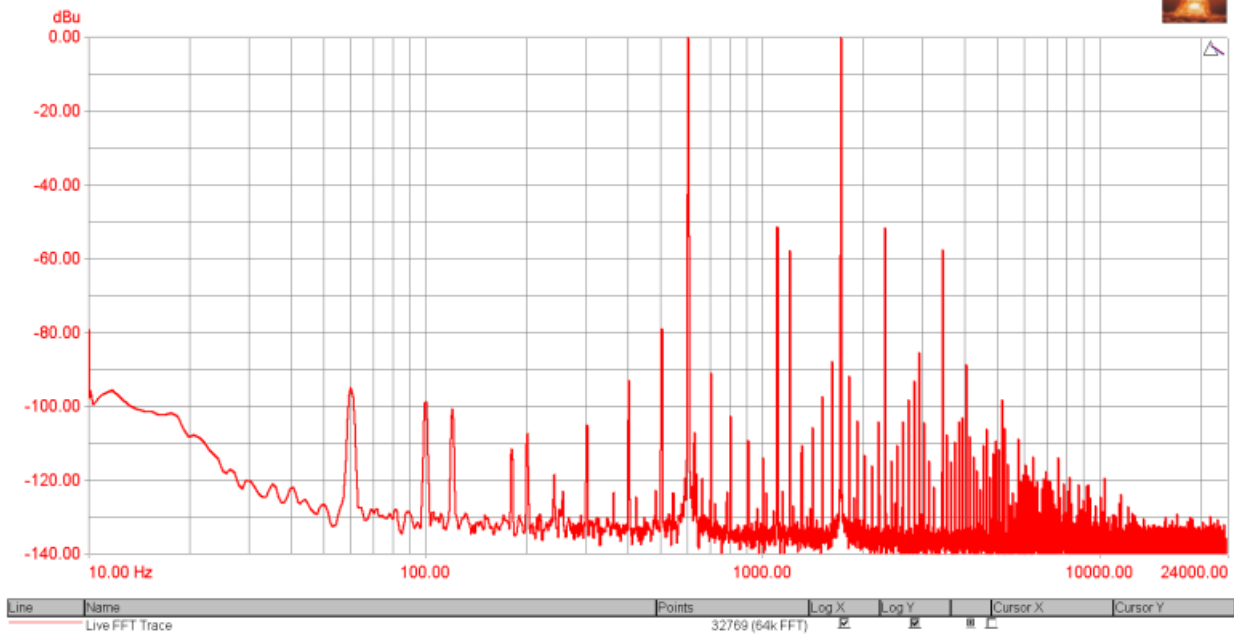

FFT Detector Readings

IMD SMPTE-DIN (Channel A)	0.33597 %	<7% >0%
IMD SMPTE-DIN (Channel B)	0.27989 %	<7% >0%

FFTD 1 Settings: Self relative, 22 Hz - 22 kHz, unweighted with intermodulation notch band reject

[Back to top](#)

A15 FFT 19+20 KHz: PASSED

Measured at 5/7/2021 12:54:46 PM

Generator Settings

Channel A:	Twin-tone, -16 dBu at 19000 Hz and 1 amplitude ratio at 1000 Hz offset
Channel B:	Twin-tone, -16 dBu at 19000 Hz and 1 amplitude ratio at 1000 Hz offset


Signal Analyzer Readings

RMS amplitude (Channel A)	-13.177 dBu	Not limit checked.
RMS amplitude (Channel B)	-13.059 dBu	Not limit checked.


CTA Readings

IMD CCIF (Channel A RMS)	0.03401 %	< 1 %
IMD CCIF (Channel B RMS)	0.02662 %	< 1 %
Settings: Self relative, 22 Hz - 22 kHz, unweighted RMS with 1/24th octave band-pass filter at the intermodulation difference frequency		

FFT 19 + 20 KHz

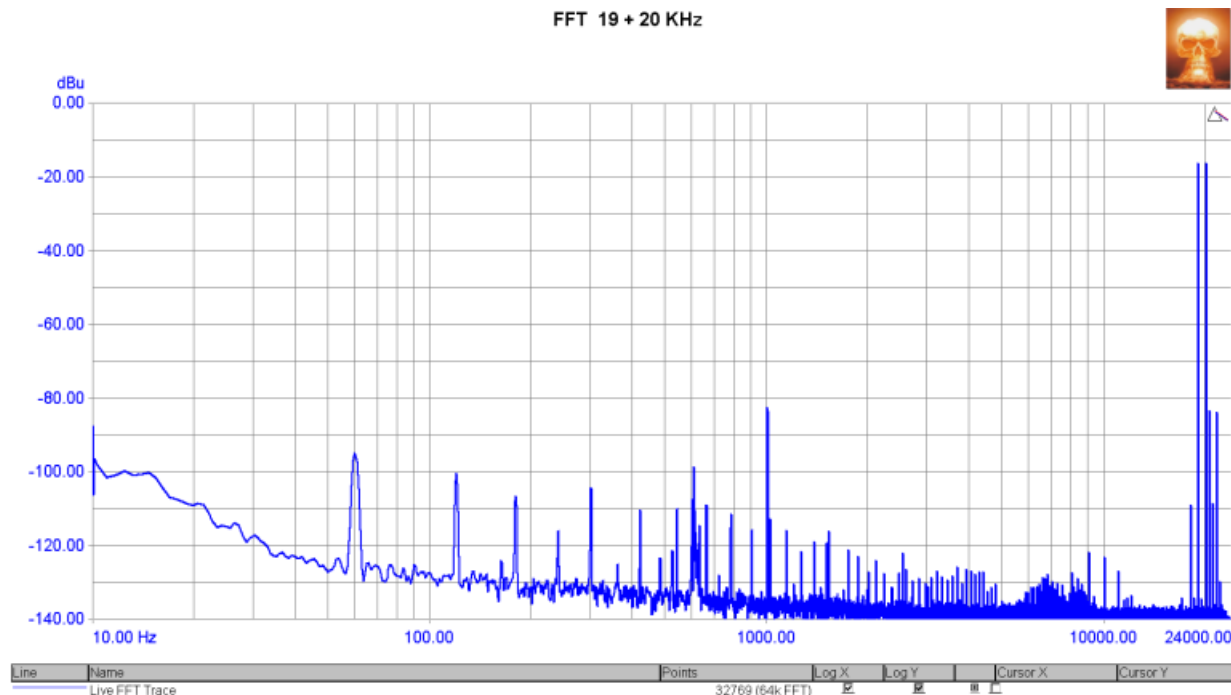

FFT 19 + 20 KHz

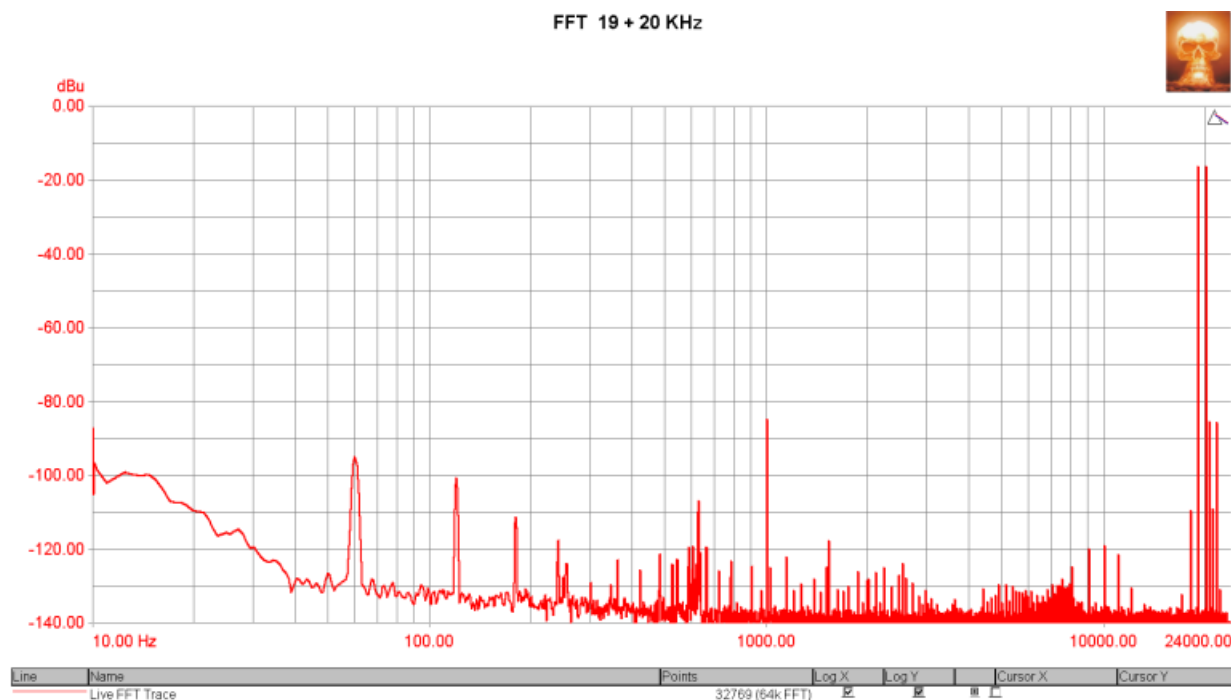

FFT Detector Readings

IMD CCIF (Channel A)	0.03402 %	< 1 %
IMD CCIF (Channel B)	0.02649 %	< 1 %
FFTD 1 Settings: Self relative, 22 Hz - 22 kHz, unweighted with window notch (14 bins) band-pass filter at the intermodulation difference frequency		

[Back to top](#)

A16 FFT residual noise: PASSED

Measured at 5/7/2021 12:55:13 PM


Generator Settings

Channel A:	Off
Channel B:	Off


Signal Analyzer Readings

RMS amplitude (Channel A)	-87.405 dBu	Not limit checked.
RMS amplitude (Channel B)	-83.975 dBu	Not limit checked.

FFT residual noise

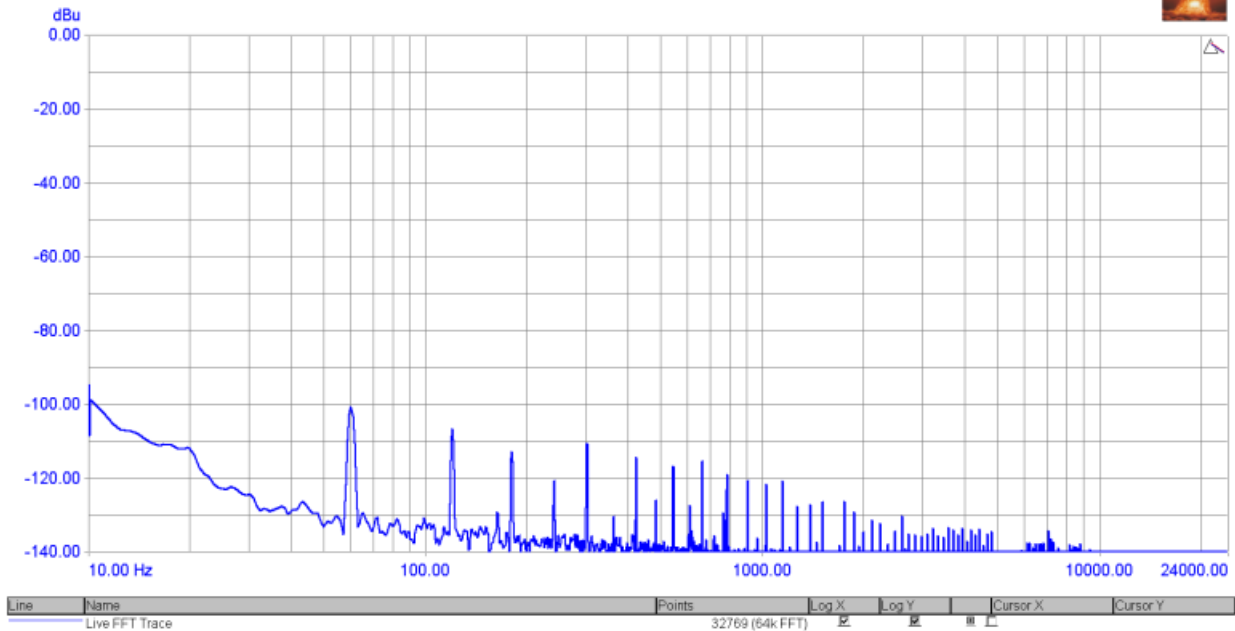

FFT residual noise

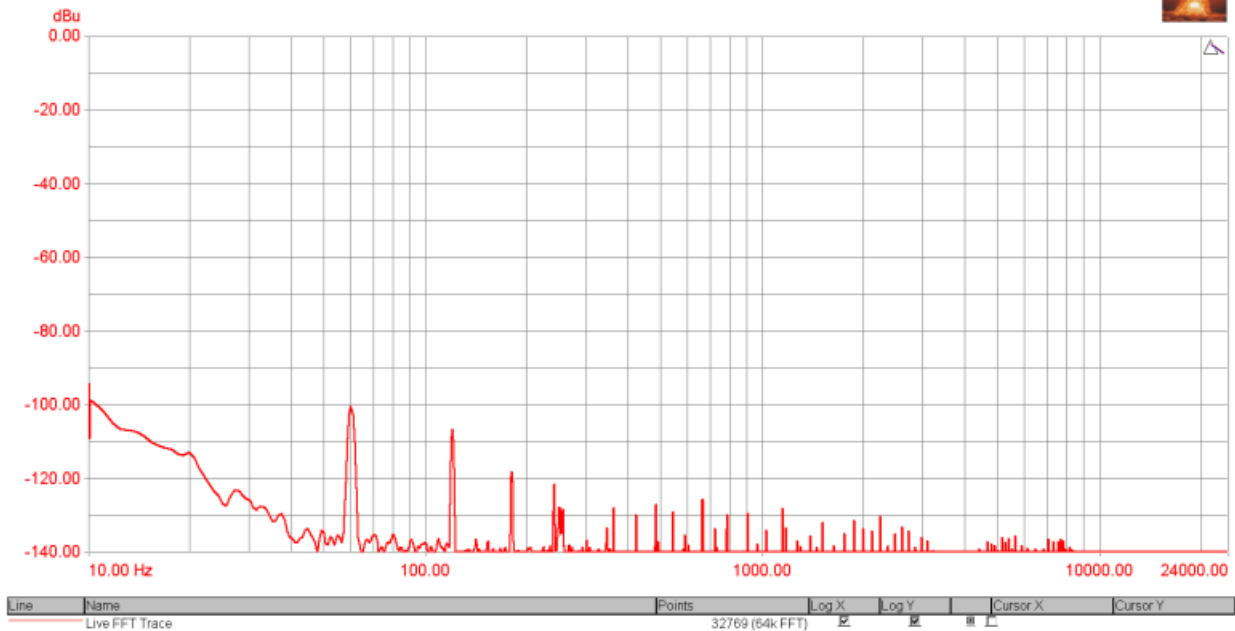

FFT Detector Readings

Noise (residual) (Channel A)	-97.541 dBu	< -80 dBu > -140 dBu
Noise (residual) (Channel B)	-98.206 dBu	< -80 dBu > -140 dBu

FFTD 1 Settings: 22 Hz - 22 kHz, unweighted with band-reject notch filters, fundamental to the 10th harmonic