

SW51+ AmpereX Holland 6EJ7 300R DISTORTION UNBAL REPORT

Overall Result: PASS

SUMMARY:	RESULT
A01 Tube Freq Resp 5Hz - 96KHz 0dBu	OK
A04 THD+N,THD, nth-HD 2 3 4 - THD+N minus 2nd and 3rd harmonics	✓
A07 Noise, SNR	✓
A16 FFT residual noise	✓
A17 Tube THD+N and 4+HD+N vs Ampl +10dBu start unBal	OK
A18 - gain linearity 4+HD+N - unBal output - 440Hz	OK
A19 - gain linearity 4+HD+N - unBal output - 40Hz	OK
A20_MT_Analogue_31Tones	OK

KEY: ✓ = Test passes, ✗ = Test fails, OK = Test has run but has no limit checking, (✗) = Test has failed to run or has not completed, [✓] = Test passes but is not required, [✗] = Test fails but is not required, ? = Test is required but has not been run.
- = Test is not required.


[Back to top](#)

A01 Tube Freq Resp 5Hz - 96KHz 0dBu: Not limit checked.

Measured at 12/13/2020 12:47:45 PM

Signal Analyzer Readings		
RMS amplitude (Channel A)	-0.141 dBu	Not limit checked.
RMS amplitude (Channel B)	0.143 dBu	Not limit checked.

CTA Readings		
Gain (Channel A RMS)	-0.142 dB	Not limit checked.
Gain (Channel B RMS)	0.143 dB	Not limit checked.
Settings: Generator relative, 22 Hz - 22 kHz, unweighted RMS with 1/3rd octave band-pass filter at the generator frequency		

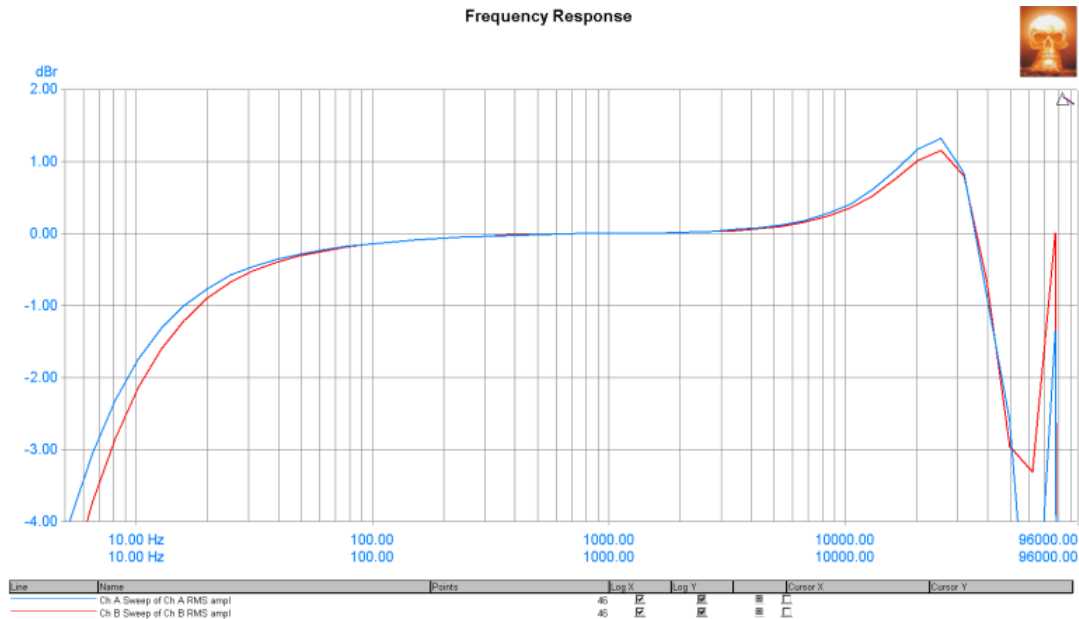

[Back to top](#)

A04 THD+N,THD, nth-HD 2 3 4 - THD+N minus 2nd and 3rd harmonics: PASSED

Measured at 12/13/2020 12:48:03 PM

Signal Analyzer Readings		
RMS amplitude (Channel A)	-0.134 dBu	Not limit checked.
RMS amplitude (Channel B)	0.149 dBu	Not limit checked.

CTA Readings

THD+N - relative (Channel A RMS)

0.32255 %

< 200 %


THD+N - relative (Channel B RMS)

0.26296 %


< 200 %

Settings: Self relative, 22 Hz - 22 kHz, unweighted RMS with 1/3rd octave band-reject filter at the input frequency

Distortion 1 KHz

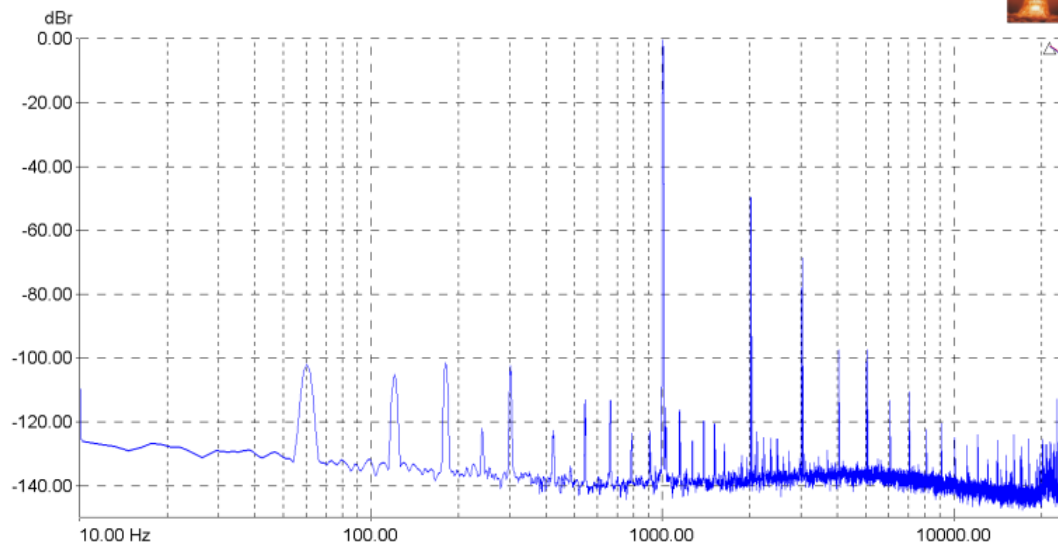

Distortion 1 KHz

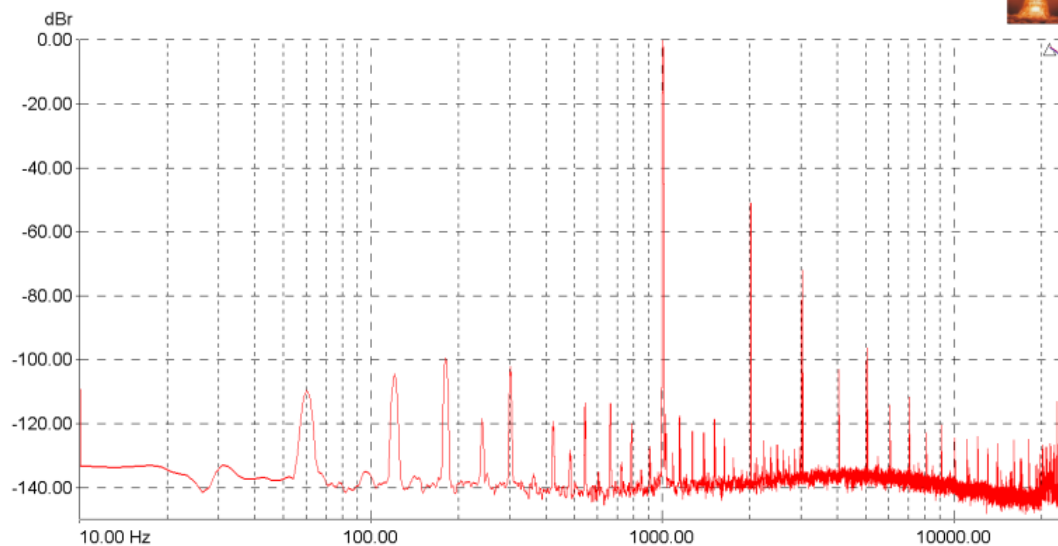

FFT Detector Readings		
THD (Channel A)	0.34072 %	< 200 % > 0 %
THD (Channel B)	0.27919 %	< 200 % > 0 %
FFTD 1 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filters from the 2nd to 10th harmonics		
2nd Harmonic Distortion (Channel A)	0.33873 %	< 200 % > 0 %
2nd Harmonic Distortion (Channel B)	0.27812 %	< 200 % > 0 %
FFTD 2 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 2nd harmonic		
3rd Harmonic Distortion (Channel A)	0.03672 %	< 200 % > 0 %
3rd Harmonic Distortion (Channel B)	0.02438 %	< 200 % > 0 %
FFTD 3 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 3rd harmonic		
4th Harmonic Distortion (Channel A)	0.00136 %	Not limit checked.
4th Harmonic Distortion (Channel B)	0.00069 %	Not limit checked.
FFTD 4 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 4th harmonic		
5th Harmonic Distortion (Channel A)	0.00137 %	Not limit checked.
5th Harmonic Distortion (Channel B)	0.00149 %	Not limit checked.
FFTD 5 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-pass notch filter at the 5th harmonic		
4+HD + N (Channel A)	0.00267 %	< 0.05 % > 0 %
4+HD + N (Channel B)	0.00242 %	< 0.05 % > 0 %
FFTD 6 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-reject notch filters, fundamental to the 3rd harmonic		
Hum (Channel A)	0.00079 %	< 0.017783 % > 0 %
Hum (Channel B)	0.00032 %	< 0.017783 % > 0 %
FFTD 7 Settings: Self relative, 22 Hz - 22 kHz, unweighted with window notch (14 bins) band-pass filter at 60 Hz		
Noise (residual) (Channel A)	0.00181 %	< 0.017783 % > 0 %
Noise (residual) (Channel B)	0.00173 %	< 0.017783 % > 0 %
FFTD 8 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-reject notch filters, fundamental to the 10th harmonic		

[Back to top](#)

A07 Noise, SNR: PASSED

Measured at 12/13/2020 12:49:06 PM

CTA Readings		
Amplitude (Channel A RMS)	-42.132 dBu	Not limit checked.
Amplitude (Channel B RMS)	-41.851 dBu	Not limit checked.
Settings: 22 Hz - 22 kHz, unweighted RMS		

FFT Detector Readings		
Noise (unweighted) (Channel A)	-104.947 dBr	< 200 dBr > -200 dBr
Noise (unweighted) (Channel B)	-105.946 dBr	< 200 dBr > -200 dBr
FFTD 1 Settings: 22 Hz - 22 kHz, unweighted with window notch (14 bins) band-reject filter at the generator frequency		
SNR (Channel A)	-105.071 dBr	< 200 dBr > -200 dBr
SNR (Channel B)	-106.092 dBr	< 200 dBr > -200 dBr
FFTD 2 Settings: 22 Hz - 22 kHz, unweighted with 1/3rd octave band-reject filter at the generator frequency		


[Back to top](#)

A16 FFT residual noise: PASSED


Measured at 12/13/2020 12:49:08 PM

Signal Analyzer Readings		
RMS amplitude (Channel A)	-86.875 dBu	Not limit checked.
RMS amplitude (Channel B)	-87.652 dBu	Not limit checked.

FFT residual noise

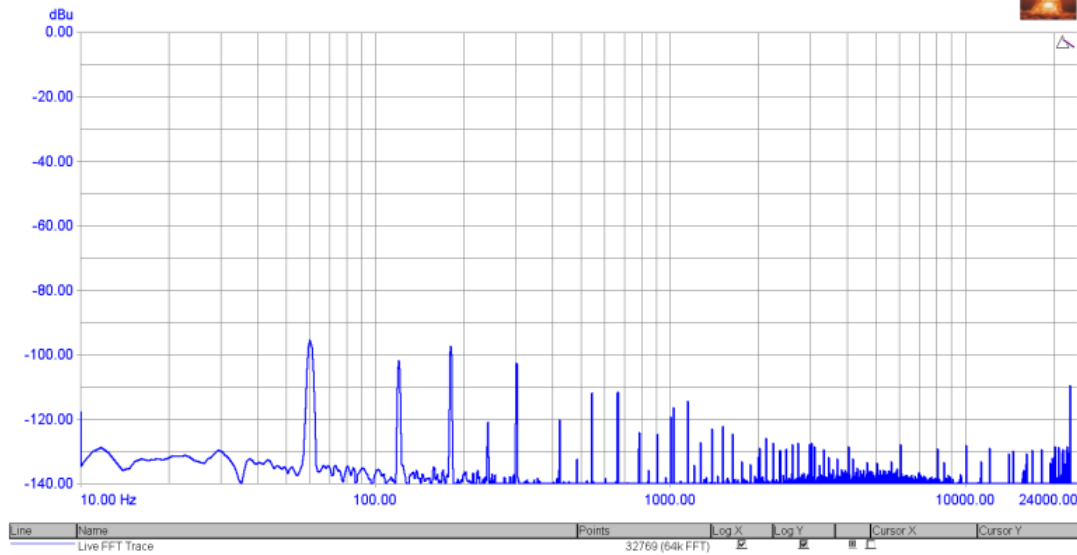

FFT residual noise

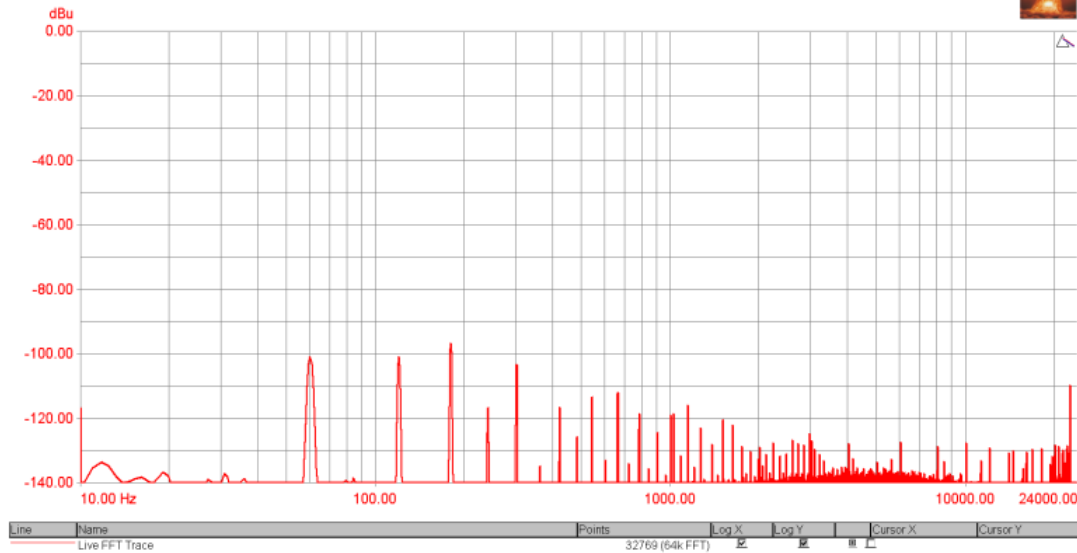

FFT Detector Readings

Noise (residual) (Channel A)	-91.720 dBu	< -80 dBu > -140 dBu
Noise (residual) (Channel B)	-92.908 dBu	< -80 dBu > -140 dBu
FFTD 1 Settings: 22 Hz - 22 kHz, unweighted with band-reject notch filters, fundamental to the 10th harmonic		

[Back to top](#)

A17 Tube THD+N and 4+HD+N vs Ampl +10dBu start unBal: Not limit checked.

Measured at 12/13/2020 12:50:30 PM


CTA Readings

Amplitude (Channel A RMS)	-0.136 dBu	Not limit checked.
Amplitude (Channel B RMS)	0.150 dBu	Not limit checked.
Settings: 22 Hz - 22 kHz, unweighted RMS		

FFT Detector Readings

THD+N - relative (Channel A)	0.296 %	Not limit checked.
THD+N - relative (Channel B)	0.240 %	Not limit checked.
FFTD 1 Settings: Self relative, 22 Hz - 22 kHz, unweighted with 1/3rd octave band-reject filter at the input frequency		
4+HD+N	0.043 %	Not limit checked.
4+HD+N	0.030 %	Not limit checked.
FFTD 2 Settings: Self relative, 22 Hz - 22 kHz, unweighted with band-reject notch filters, fundamental to the 2nd harmonic		

THD+N and 4+HD+N vs Amplitude

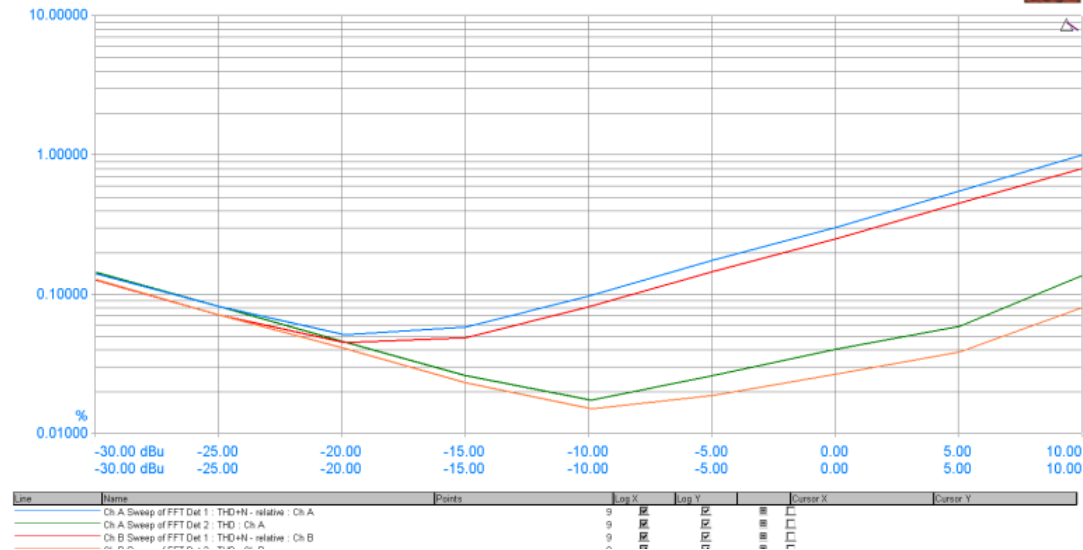
[Back to top](#)


A18 - gain linearity 4+HD+N - unBal output - 440Hz: Not limit checked.

Measured at 12/13/2020 12:51:27 PM

Signal Analyzer Readings		
Frequency (Channel A)	440.000 Hz	Not limit checked.

CTA Readings		
Gain (Channel A RMS)	-0.162 dB	Not limit checked.
Gain (Channel B RMS)	0.125 dB	Not limit checked.
Settings: Generator relative, 22 Hz - 22 kHz, unweighted RMS with 1/3rd octave band-pass filter at the generator frequency		

Gain Linearity and 4+HD+N vs Amplitude - 440 Hz

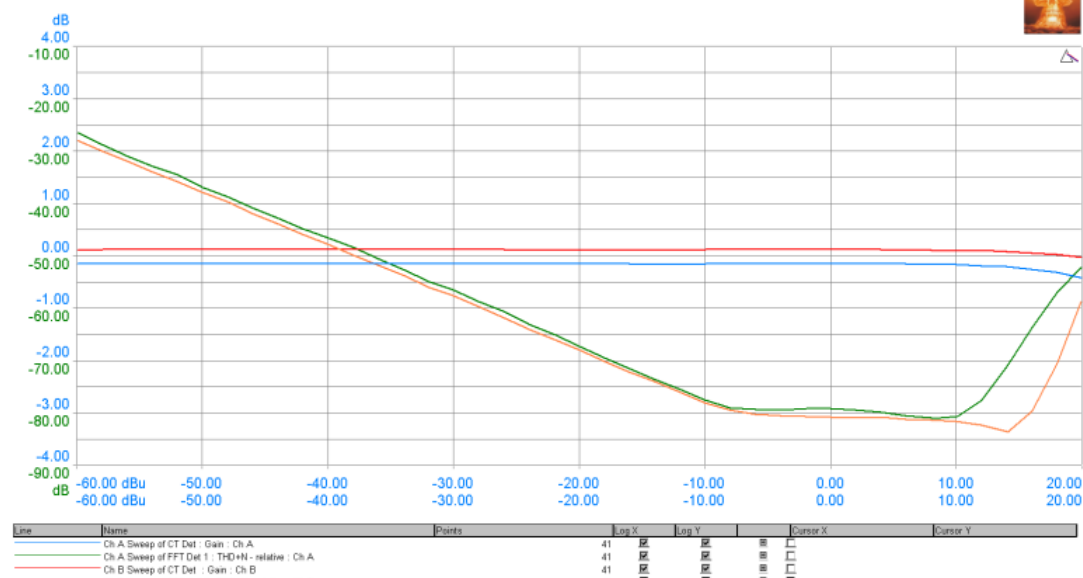

[Back to top](#)

A19 - gain linearity 4+HD+N - unBal output - 40Hz: Not limit checked.

Measured at 12/13/2020 12:52:20 PM

Signal Analyzer Readings		
Frequency (Channel A)	40.000 Hz	Not limit checked.

CTA Readings		
Gain (Channel A RMS)	-0.651 dB	Not limit checked.
Gain (Channel B RMS)	-0.402 dB	Not limit checked.
Settings: Generator relative, 22 Hz - 22 kHz, unweighted RMS with 1/3rd octave band-pass filter at the generator frequency		

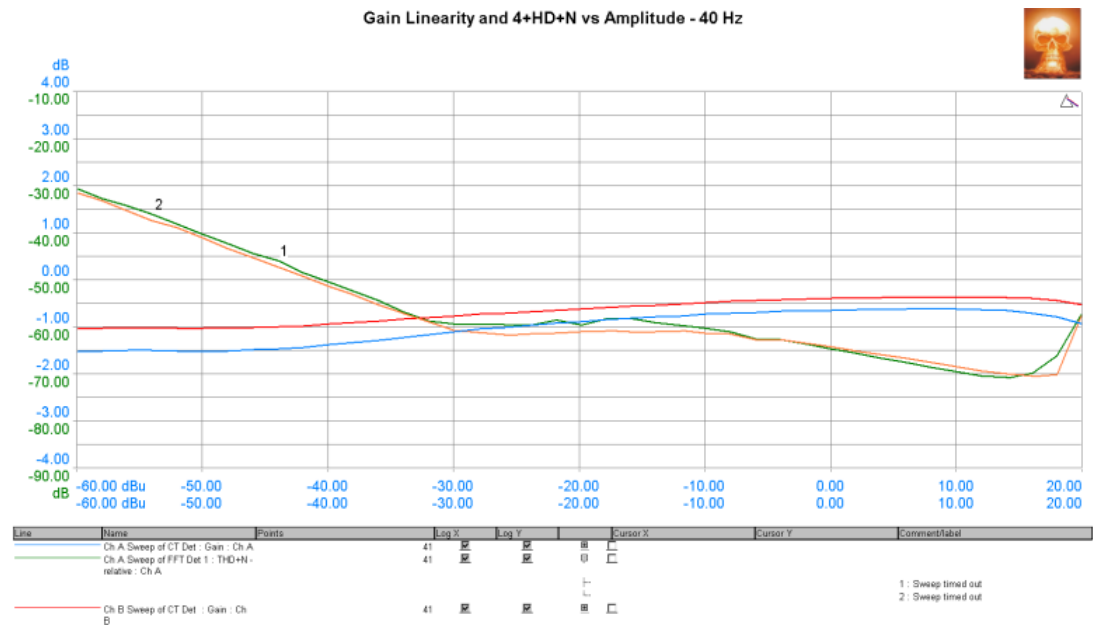


[Back to top](#)


A20_MT_Analogue_31Tones: Not limit checked.

Measured at 12/13/2020 12:53:22 PM

Signal Analyzer Readings		
RMS amplitude (Channel A)	-19.233 dBu	Not limit checked.
RMS amplitude (Channel B)	-20.657 dBu	Not limit checked.

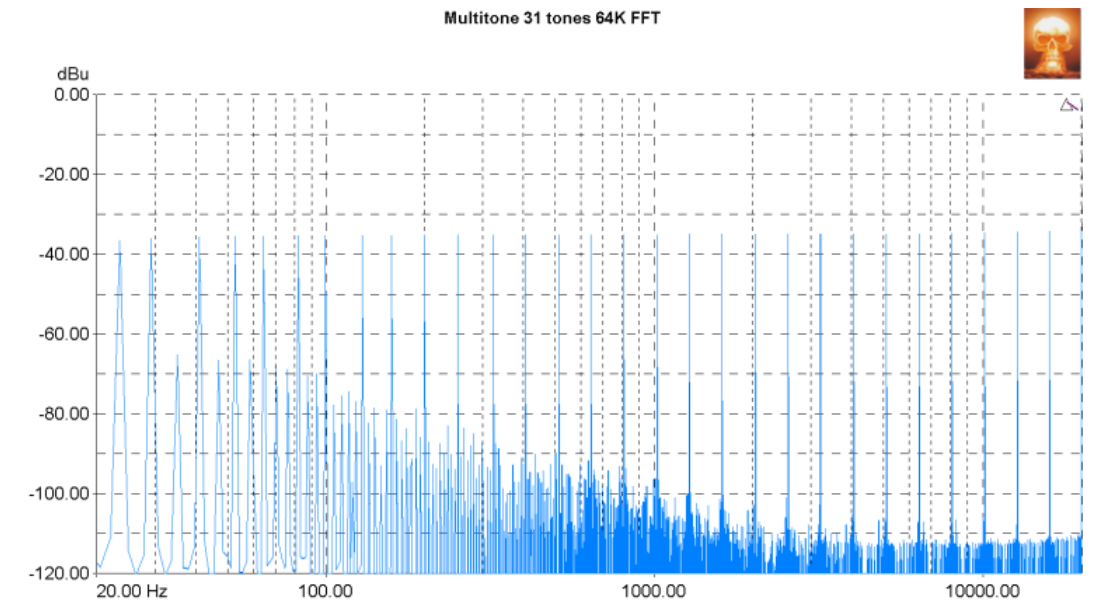

Multitone 31 tones 64K FFT

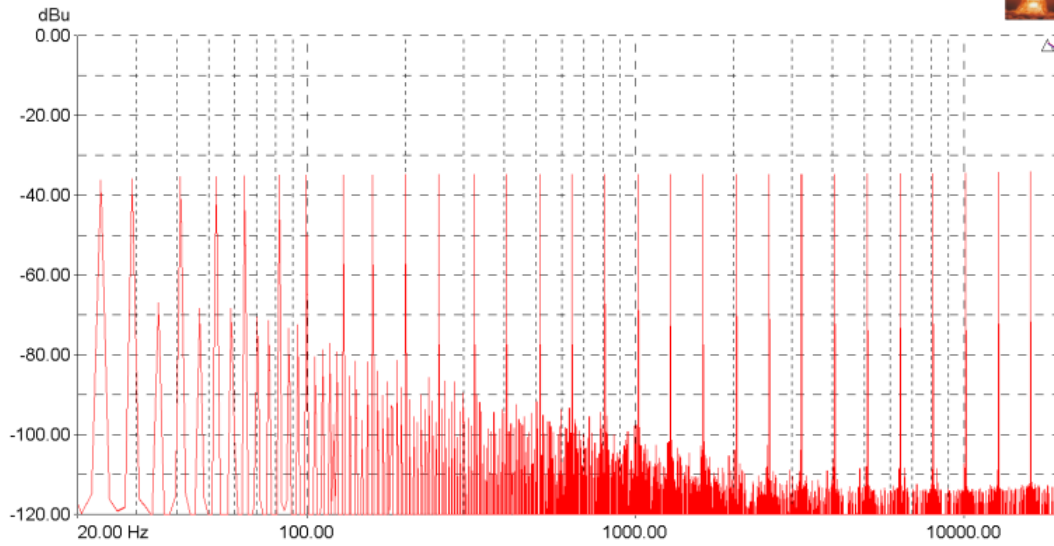

FFT Detector Readings		
User: TD (Channel A)	104.108 dB	Not limit checked.
User: TD (Channel B)	106.806 dB	Not limit checked.
FFTD 1 Settings: User: TD		
User: Noise (Channel A)	-82.938 dBu	Not limit checked.
User: Noise (Channel B)	-83.154 dBu	Not limit checked.
FFTD 2 Settings: User: Noise		
User: TD+N (Channel A)	104.108 dB	Not limit checked.
User: TD+N (Channel B)	106.806 dB	Not limit checked.
FFTD 3 Settings: User: TD+N		
User: LF Rolloff (Channel A)	-15.292 dB	Not limit checked.
User: LF Rolloff (Channel B)	-11.747 dB	Not limit checked.
FFTD 4 Settings: User: LF Rolloff		
User: HF Rolloff (Channel A)	0.395 dB	Not limit checked.
User: HF Rolloff (Channel B)	2.219 dB	Not limit checked.
FFTD 5 Settings: User: HF Rolloff		